

LED DRIVER DALI SUPERIOR

Constant voltage LED driver with DALI dimming interface



PRODUCT BENEFITS

- Quick and comfortable installation thanks to tool-less cable clamp concept
- 5 years guarantee
- Low flickering enables high light quality as well as good visual comfort
- Push DIM application for easy control
- Suitable for emergency lighting

AREAS OF APPLICATION


- Cove lighting, even in tight spaces
- Hotels, shops, hospitality, residential interiors
- Museums, art galleries
- Strip lighting in single and open-plan offices
- Suitable for use in emergency lighting systems (DC capable)

E-number	Product name	GTIN (EAN)	V	V _{OUT}	W	Hz	W	t _{inj} ²
	DR DALI-SUP-45/220-240/24	4058075421820	220...240	24	45.0	50/60	1...100	50000
	DR DALI-SUP-80/220-240/24	4058075421844	220...240	24	80.0	50/60	1...100	50000
	DR DALI-SUP-150/220-240/24	4058075421868	220...240	24	150.0	50/60	1...100	50000

Product name	T _a	T _c	PROTECTION CLASS	L × W × H [mm]	PRICE (EUR) ³	Light bulb icon
DR DALI-SUP-45/220-240/24	-20...+50	85.0	II	229 x 47.0 x 32.0		1
DR DALI-SUP-80/220-240/24	-20...+45	85.0	II	330 x 47.0 x 32.0		2
DR DALI-SUP-150/220-240/24	-20...+45	85.0	II	330 x 47.0 x 32.0		3

LED DRIVER SUP

Constant voltage LED driver

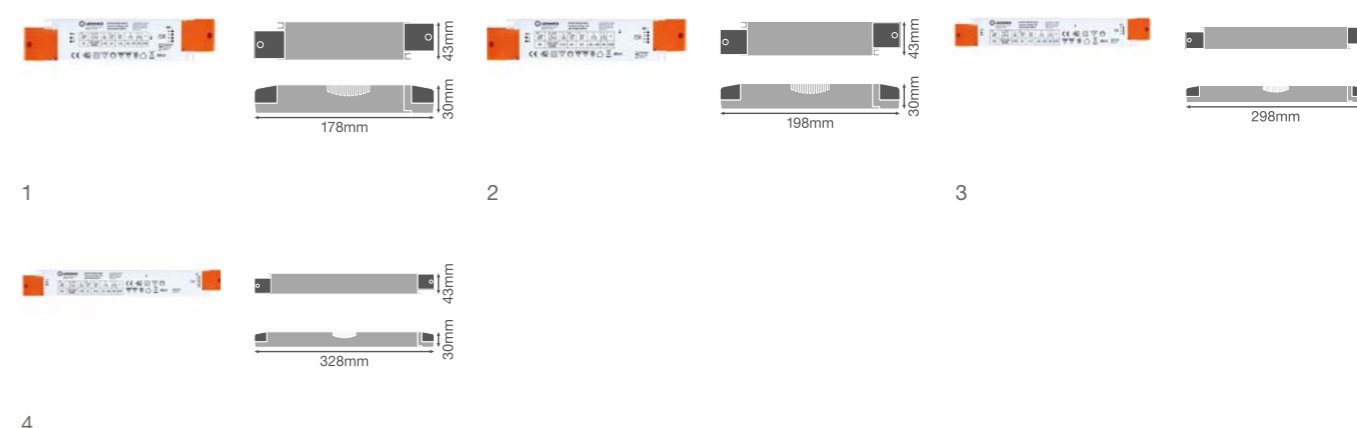

PRODUCT BENEFITS

- Perfectly matched to 24 V LED flexible strips
- Long reliable life at maximum permitted temperatures
- 5 years guarantee
- Maintenance-free operation and minimal installation costs
- Quick and simple installation
- High efficiency and reliability

AREAS OF APPLICATION

- Cove lighting, even in tight spaces
- Wallwasher effect lighting in living rooms, dining rooms, bedrooms, entrances
- Offices, shopping centers, hospitals, restaurants, hotels
- For indoor SELV installations

E-number	Product name	GTIN (EAN)	V	V _{OUT}	W	Hz	W	t _{inj}
	DR-SUP-30/220-240/24	4058075437784	220...240	24	30.0	50/60	-	60000
	DR-SUP-60/220-240/24	4058075437807	220...240	24	60.0	50/60	-	60000
	DR-SUP-100/220-240/24	4058075437821	220...240	24	100.0	50/60	-	60000
	DR-SUP-200/220-240/24	4058075437845	220...240	24	200.0	50/60	-	60000

Product name	T _a	T _c	PROTECTION CLASS	L × W × H [mm]	PRICE (EUR) ³	Light bulb icon
DR-SUP-30/220-240/24	-20...+55	80.0	II	178 x 43.0 x 30.0		1
DR-SUP-60/220-240/24	-20...+55	90.0	II	198 x 43.0 x 30.0		2
DR-SUP-100/220-240/24	-20...+55	85.0	II	298 x 43.0 x 30.0		3
DR-SUP-200/220-240/24	-20...+55	90.0	II	328 x 73.0 x 30.0		4

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² At maximum T_c = 75°C / 10% failure rate | ³ Recommended retail price excl. VAT

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Recommended retail price excl. VAT