


LED STRIP VALUE-600

LED strips with 600 lm/m for general applications



Prewired cables on both sides

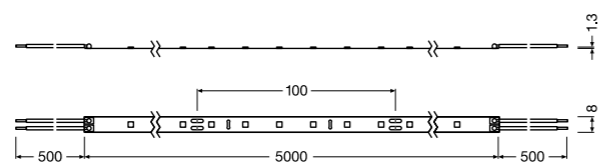

E-number	Product name	GTIN (EAN)	COLOR	K	lm ² METER	lm	W ² METER	W	lm/W ²	V _{DC}
LS VAL-600/827/5		4058075296664	Warm white	2700	540	2276	5.5	27.0	98.0	24
LS VAL-600/830/5		4058075296787	White	3000	550	2311	5.5	27.0	100.0	24
LS VAL-600/840/5		4058075296930	Cool white	4000	570	2533	5.5	27.0	104.0	24
LS VAL-600/865/5		4058075296992	Daylight	6500	580	2533	5.5	27.0	105.0	24

Product name	PITCH [mm]	α	IP	t _{inj}	T _a	L x W x H [mm]	CABLE LENGTH	Imax [mA]	PRICE (EUR)	PRICE METER (EUR)
LS VAL-600/827/5	60	16.67	120	A+	20000	-20...+40	5000x8.0x1.3	500	100.0	
LS VAL-600/830/5	60	16.67	120	A+	20000	-20...+40	5000x8.0x1.3	500	100.0	
LS VAL-600/840/5	60	16.67	120	A+	20000	-20...+40	5000x8.0x1.3	500	100.0	
LS VAL-600/865/5	60	16.67	120	A+	20000	-20...+40	5000x8.0x1.3	500	100.0	

¹ Dimmable with suitable drivers, see also www.ledvance.com/dim | ² Value based on first meter of the product | ³ L70/B50 at Tc max. 65°C | ⁴ Recommended retail price excl. VAT

STRIP ACCESSORIES

Extract from the system components of the extensive LED Strip accessories

► Details see chapter STRIP ACCESSORIES

CONNECTORS


ENDCAPS

MOUNTING BRACKETS

PROFILES

Matching profiles (orange) with corresponding covers and installation accessories

► Details see chapter PROFILES

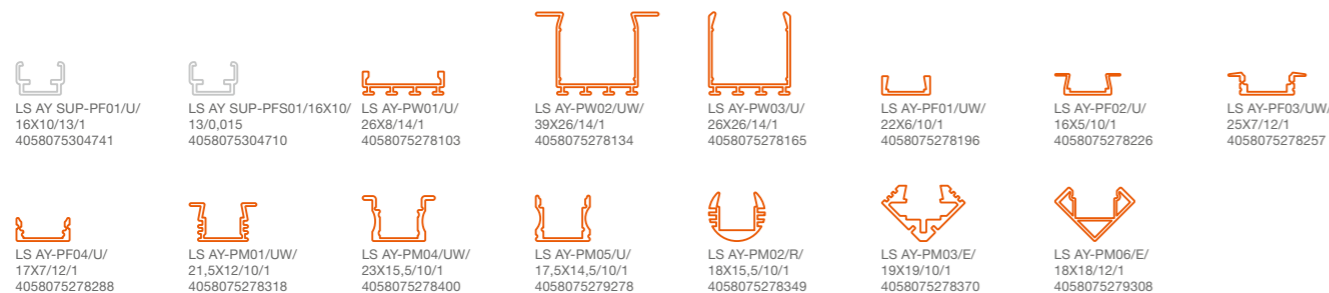

DRIVERS

Extract from the versatile driver portfolio

► Details see chapter DRIVERS



DR DIM-PFM-60/220-240/24/P
4058075379190

DR-PFM-60/220-240/24/P
4058075239913


DR-VAL-60/220-240/24/P
4058075240094

LED STRIP VALUE-600 PROTECTED

IP65 protected LED strips with 600 lm/m for general applications



Prewired cables on both sides

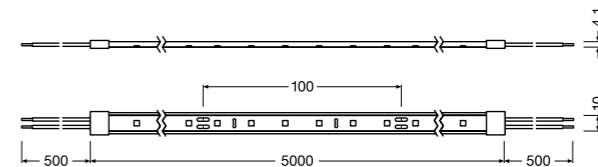

E-number	Product name	GTIN (EAN)	COLOR	K	lm ² METER	lm	W ² METER	W	lm/W ²	V _{DC}
LS VAL-600/827/5/IP65		4058075296541	Warm white	2700	510	2151	5.5	27.0	93.0	24
LS VAL-600/830/5/IP65		4058075296572	White	3000	520	2196	5.5	27.0	95.0	24
LS VAL-600/840/5/IP65		4058075296602	Cool white	4000	540	2400	5.5	27.0	98.0	24
LS VAL-600/865/5/IP65		4058075296633	Daylight	6500	550	2400	5.5	27.0	100.0	24

Product name	PITCH [mm]	α	IP	t _{inj}	T _a	L x W x H [mm]	CABLE LENGTH	Imax [mA]	PRICE (EUR)	PRICE METER (EUR)
LS VAL-600/827/5/IP65	60	16.67	105	A+	20000	-20...+40	5000x10.0x4.1	500	100.0	
LS VAL-600/830/5/IP65	60	16.67	105	A+	20000	-20...+40	5000x10.0x4.1	500	100.0	
LS VAL-600/840/5/IP65	60	16.67	105	A+	20000	-20...+40	5000x10.0x4.1	500	100.0	
LS VAL-600/865/5/IP65	60	16.67	105	A+	20000	-20...+40	5000x10.0x4.1	500	100.0	

¹ Dimmable with suitable drivers, see also www.ledvance.com/dim | ² Value based on first meter of the product | ³ L70/B50 at Tc max. 65°C | ⁴ Recommended retail price excl. VAT

STRIP ACCESSORIES

Extract from the system components of the extensive LED Strip accessories

► Details see chapter STRIP ACCESSORIES

CONNECTORS

ENDCAPS

MOUNTING BRACKETS




LS AY PFM-10/SE/P SIL-SEAL
4058075275744

PROFILES

Matching profiles (orange) with corresponding covers and installation accessories

► Details see chapter PROFILES

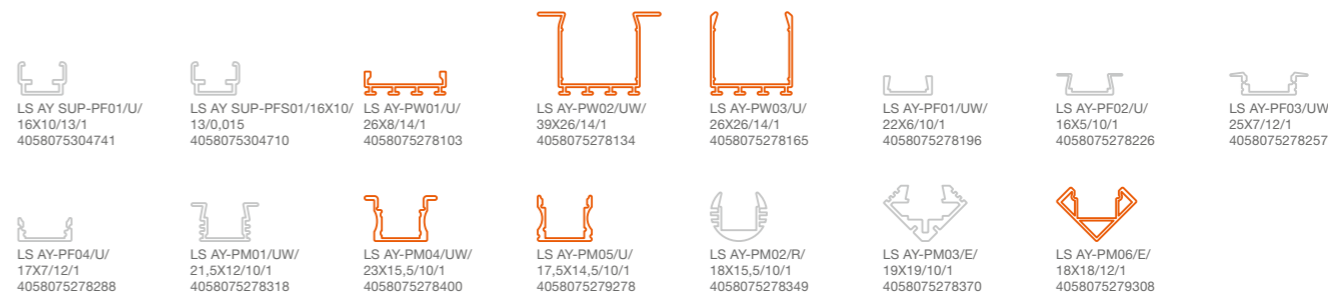

DRIVERS

Extract from the versatile driver portfolio

► Details see chapter DRIVERS



DR DIM-PFM-60/220-240/24/P
4058075379190

DR-PFM-60/220-240/24/P
4058075239913

DR-VAL-60/220-240/24/P
4058075240094