


LED VALUE BATTEN

T8 BATTEN LUMINAIRES FOR WALL OR CEILING MOUNTING



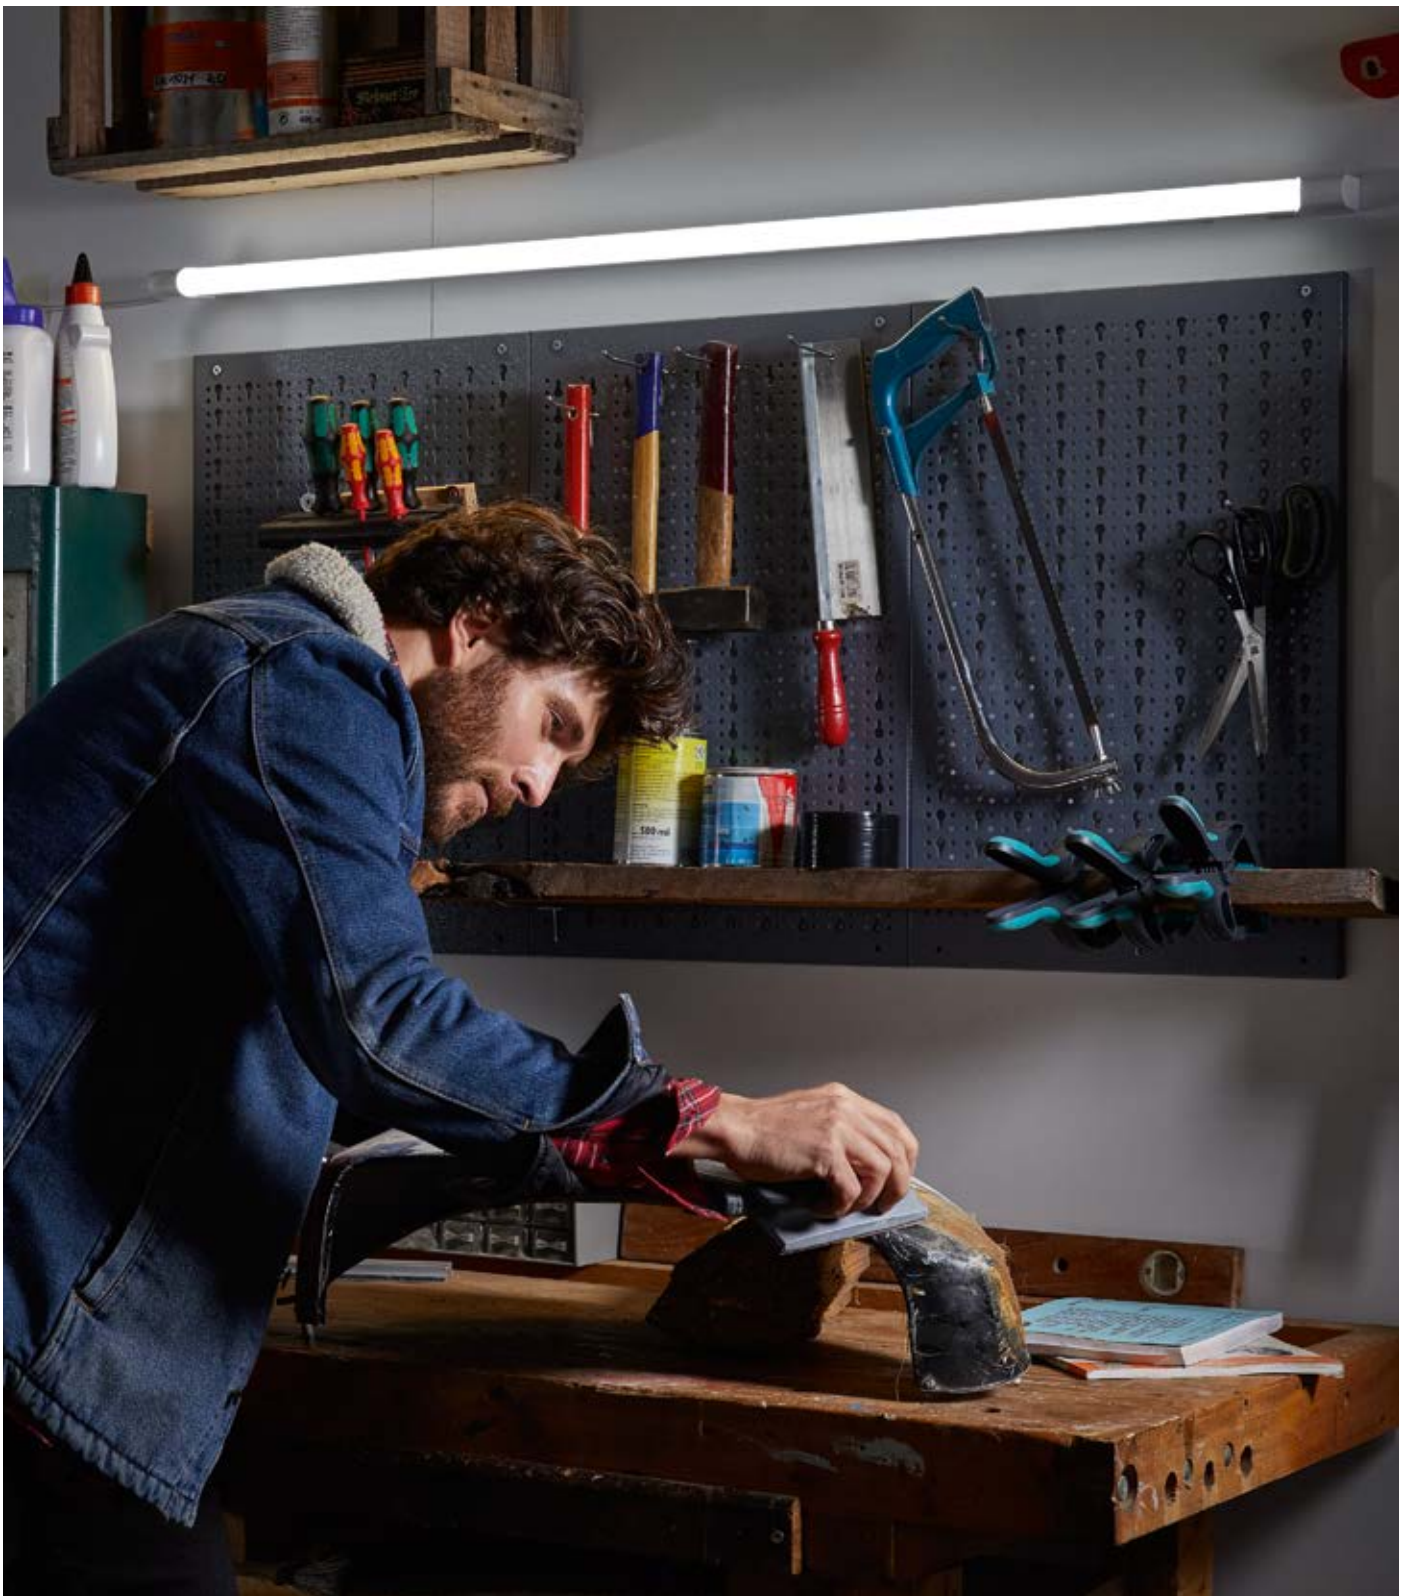

1
LED Value Batten
600 mm 10 W 4000 K



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t ₉₀ ²	W	lm	Energy efficiency grade ³	Temperature range	K
--------------	------------	-----	-------	----------	------------------------------	---	----	--------------------------------------	-------------------	---

LED Value Batten 1500 mm 24 W 4000 K	4058075268241	-	Silver	Aluminum	30000	24.00	2400	A++/A+/A	-20...+40	4000
LED Value Batten 1200 mm 20 W 4000 K	4058075268180	-	Silver	Aluminum	30000	20.00	2000	A++/A+/A	-20...+40	4000
LED Value Batten 600 mm 10 W 4000 K	4058075268142	1	Silver	Aluminum	30000	10.00	1000	A++/A+/A	-20...+40	4000

Product name	CRI	Beam angle	IP	Beam diameter	Beam length [mm]	Beam width [mm]	Beam height [mm]	Beam area
--------------	-----	------------	----	---------------	------------------	-----------------	------------------	-----------

LED Value Batten 1500 mm 24 W 4000 K	≥80	120	IP20	25000	1534.0	29.0	44.0	10
LED Value Batten 1200 mm 20 W 4000 K	≥80	120	IP20	25000	1234.0	29.0	44.0	20
LED Value Batten 600 mm 10 W 4000 K	≥80	120	IP20	25000	634.0	29.0	44.0	20

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | ² Average lifetime in hours | ³ Energy efficiency grade of the permanently integrated, non-exchangeable LED modules. Energy efficiency index (EEL) on a scale of A++ (highest efficiency) to E (lowest efficiency).