


# LED PANEL VISIONAL PROFESSIONAL+

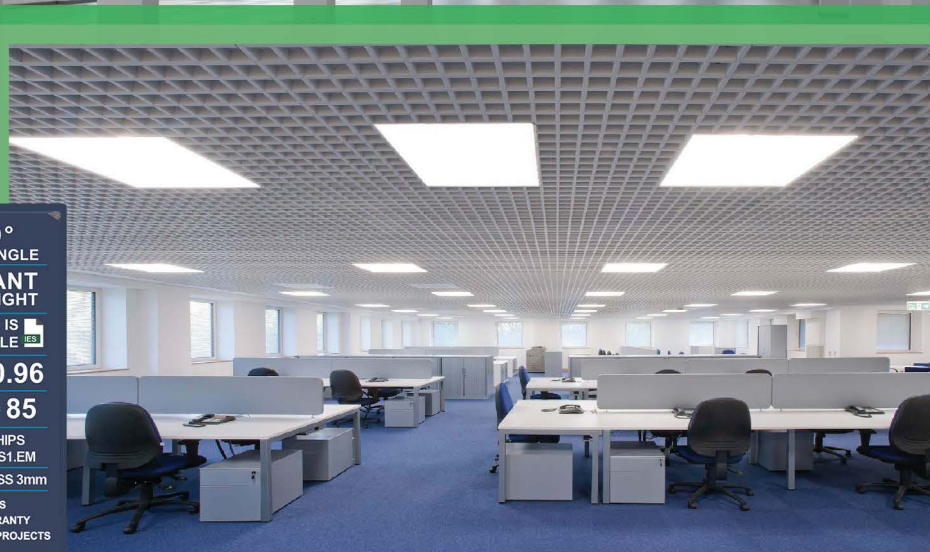

**VISIONAL LED PROFESSIONAL+**

160°  
BEAM ANGLE  
INSTANT  
FULL LIGHT  
IES FILE IS  
AVAILABLE

PF ≥ 0.96  
CRI ≥ 85  
LED CHIPS  
GW JTLMS1.EM  
PMAA GLASS 3mm

5 YEARS  
WARRANTY  
FOR PROJECTS

PROTECTION RATING  
IP44 / IK07  
NO FLICKERING  
DRIVER INCLUDED  
50 000 HOURS  
EXTRA LONG LIFETIME

595x595x10mm DEVELOPED IN EUROPE  
**LED PANEL LIGHT**  
3000K WARM WHITE    4000K NATURAL WHITE    6000K COLD WHITE  
**POWER 40W**  
**BRIGHTNESS 4800 LUMEN**



CE RoHS    CB FC    EMC compliance

## GENERAL DESCRIPTION

LED PANEL LIGHT VISIONAL PROFESSIONAL+ combined modern technologies and classical slim design. Due to advanced PMAA technology micro structure light guide plate, these panel lights are brighter than analogues. LED PANEL LIGHT VISIONAL PROFESSIONAL+ provide high energy-efficiency, extra long lifetime, has no glare-effect and no flickering effect. The ideal light for offices, shopping malls, hotels, hospitals and etc.

**VISIONAL** **LED**  
PROFESSIONAL+

# LED PANEL VISIONAL PROFESSIONAL+

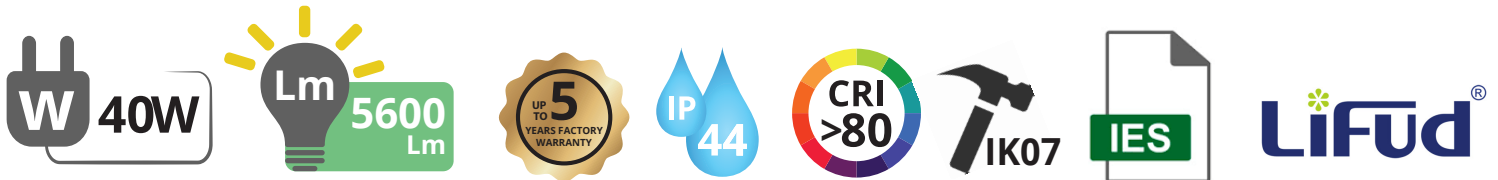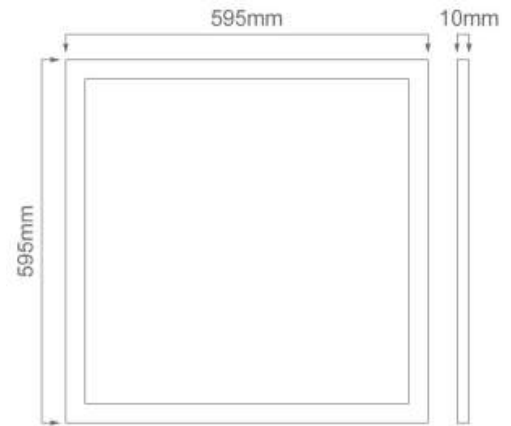

DALI  
OPTIONAL

EMC  
compliance



✓ **RoHS**



## DETAILED DESCRIPTION

<b>POWER</b> JAUDA	40W (40kWh/1000h)	<b>BEAM ANGLE</b> GAISMAS LENĶIS	160°
<b>BRIGHTNESS</b> SPILGTUMS	4800 LUMEN	<b>SIZE</b> IZMĒRS	595 x 595 x 10mm
<b>POWER FACTOR</b> PF KOEFICIENTS	PF ≥ 0.96	<b>DIMMABLE</b> DIMMĒJAMS	OPTIONAL
<b>RA COEFFICIENT</b> RA KOEFICIENTS	CRI ≥ 85	<b>VOLTAGE</b> SPRIEGUMS	110-265V 50/60HZ
<b>POWER SUPPLY EFFICIENCY</b> ENERGOAPGĀDES EFEKTIVĪTĀTE	>90%	<b>PROTECTION LEVEL</b> AIZSARDZĪBAS LĪMENIS	IP 44
<b>LIFETIME</b> KALPOŠANAS ILGUMS	50000 h	<b>TEMPERATURE</b> TEMPERATŪRA	-40C - +50C
<b>COLOR TEMPERATURE</b> KRĀSAS TEMPERATŪRA	3000K / 4000K / 6000K	<b>OPTIONAL MODELS</b> CITI MODEĻI	48W (1200 x 300 mm) 72W (1200 x 600 mm)