


## ORBIS® SPARKLE

MULTIFUNCTIONAL LED WALL AND CEILING LUMINAIRES WITH SPARKLING EFFECT



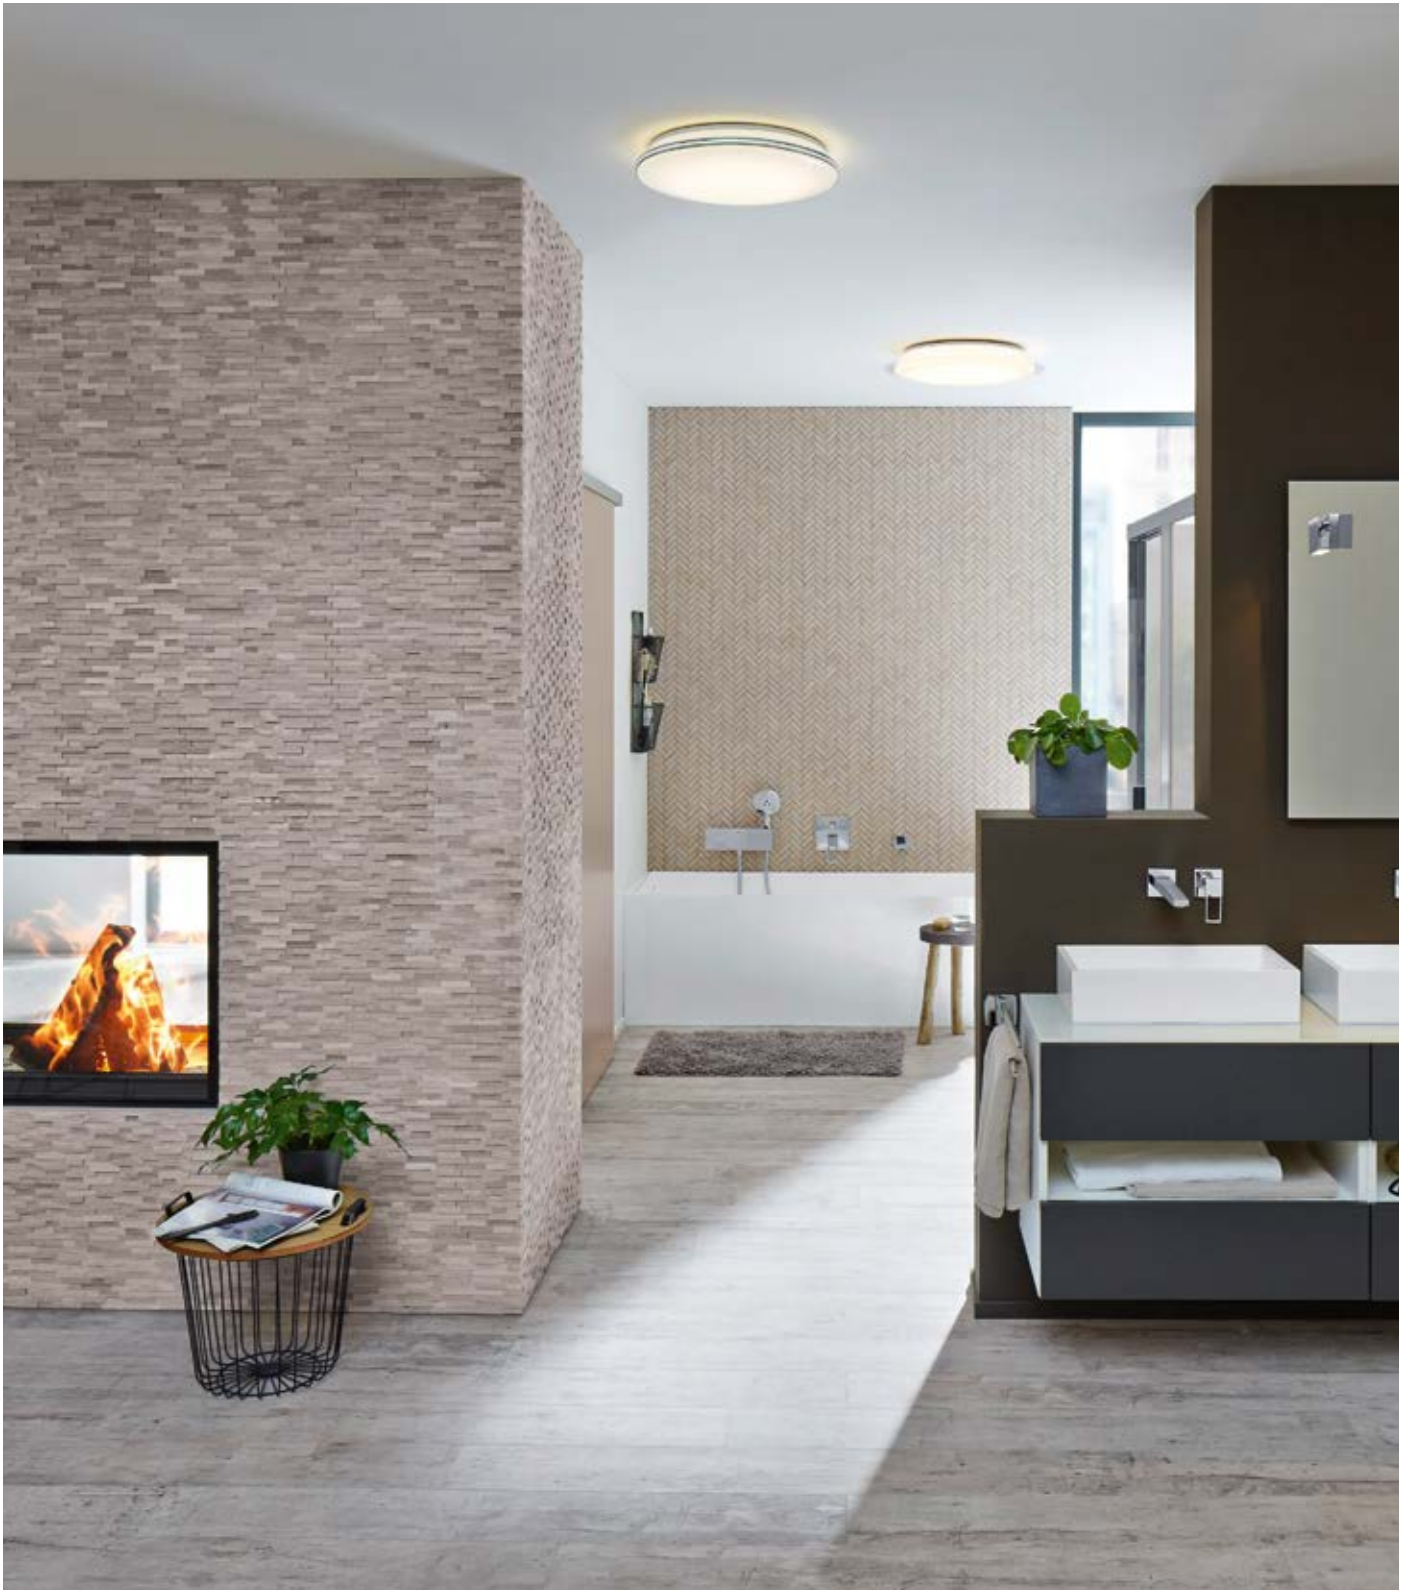

1  
ORBIS Sparkle  
600 38 W 2800-6000 K



2  
ORBIS Sparkle  
500 28 W 2800-6000 K



3  
ORBIS Sparkle  
450 24 W 3000 K



4  
ORBIS Sparkle  
450 24 W 2700-6500 K



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>90</sub> <sup>2</sup>	W	lm	Beam angle <sup>3</sup>	K	CRI
ORBIS Sparkle 600 38 W 2800-6000 K	4058075260337	1	White	Aluminum	40000	38.00	3600	A++/A+/A	2800...6000	>80
ORBIS Sparkle 500 28 W 2800-6000 K	4058075260313	2	White	Aluminum	40000	28.00	2600	A++/A+/A	2800...6000	>80
ORBIS Sparkle 450 24 W 3000 K	4058075260290	3	White	Aluminum	40000	24.00	2000	A++/A+/A	3000	>80
ORBIS Sparkle 450 24 W 2700-6500 K	4058075259577	4	White	Aluminum	40000	24.00	2000	A++/A+/A	2700...6500	>80

Product name	h (mm)	IP	Beam angle	h (mm)	Ø d (mm)	Weight
ORBIS Sparkle 600 38 W 2800-6000 K	120	IP20	25000	120.0	600.0	6
ORBIS Sparkle 500 28 W 2800-6000 K	120	IP20	25000	91.0	500.0	6
ORBIS Sparkle 450 24 W 3000 K	120	IP20	25000	91.0	450.0	6
ORBIS Sparkle 450 24 W 2700-6500 K	120	IP20	25000	91.0	450.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Energy efficiency grade of the permanently integrated, non-exchangeable LED modules. Energy efficiency index (EEL) on a scale of A++ (highest efficiency) to E (lowest efficiency).